

Clinical Assistant



LEXMARK

Lexmark Clinical Assistant

Lexmark's Clinical Assistant is an MFP that is value rich, easy to implement and simple to use. It is designed for mission-critical healthcare workflow applications.



Scan to EMR - Enhances the standard "scan to folder" functionality by scanning directly to a directory used by a health institution electronic medical records system. In addition, the MFP user can scan to a Window's network folder. Administrators can create folder destinations, and users can select their desired destination, browse folders and create folders.



Orders Routing - Allows additional destination device IP addresses and routing of scanned documents directly to network printers. Scanned jobs can be marked "STAT" (urgent) or normal. An archive feature is also available in case the users want to archive the images for historical purposes.



Card Copy - Allows healthcare workers to copy both sides of the patient's insurance and/or other identification cards, and have them printed on the same side of a single page.



Bookmark Forms - Places an icon on the home screen labeled "Bookmark Forms." This icon is a shortcut to the forms menu which allows the user to locate and print electronic forms which reside on a remote server.

The Lexmark Clinical Assistant is based on the award-winning Lexmark X646dte monochrome laser MFP platform.



In the Box

Lexmark Clinical Assistant

- X646dte MFP
- Custom e-task interface
- 21,000-page Return Program Print Cartridge¹
- 40+GB Hard Drive
- Duplex
- Setup Sheet
- Software and Documentation CD
- Power Cord
- RJ-11 Phone Cable

Product Specifications

Part Number	22G0910
Product Class	Workgroup laser MFP
Speed	Up to 50 ppm
Time to First Page	As fast as 8.5 seconds
Print Resolution	1200 x 1200 dpi, 2400 image quality printing, 600 x 600 dpi
Processor	533 MHz
Memory (std./max.)	256MB/768MB
Connectivity	
Standard	USB, Ethernet, USB Direct Interface
Optional	Parallel, Serial, Wireless, Gigabit Ethernet, Fiber Optic
Option Slots	DRAM DIMM slots: 1; ISP (INA) slots: 1; Firmware Card/Flash memory slots: 2
Printer Languages	PostScript 3, PCL 6 and PPDS Migration Tool
Direct Print Formats	jpeg, tiff, gif, bmp, png, pcx, dcx, pdf v1.5, html
Fonts	PostScript: 158 scalable; PCL: 89 scalable including OCR-A, OCR-B and Code 3 of 9 bar codes, 2 bitmapped; PPDS: 39 scalable, 5 bitmapped

Product Specifications (cont'd)	
Copy	Speed: up to 50 ppm, reduce/enlarge (25-400%), paper saver (2-up and 4-up), collation, darkness adjustment, original size to output size selection, copy select 1-999, job interrupt, date/time stamp, single-pass duplex, message overlay, priority copy, copy countdown
Fax	Speed: 33.6 bps max.; transmission speed: approximately 3 seconds per page; resolution: 200 x 100 dpi, 200 x 200 dpi, 300 x 300 dpi, 400 x 400 dpi; fax redirect, group fax, manual fax, fax from PC, up to 512-character shortcuts, fax preservation, LDAP lookup, Caller ID, speed dials, block junk faxes
Scan	Output resolutions: up to 600 x 600 dpi black, up to 300 x 300 dpi color; scan destinations: Network TWAIN, USB Direct Interface, e-mail, FTP, LDSS, Scan-to-PC; File Formats: TIFF, JPG, PDF; legal-size from flatbed; simplex scanning
Operating Systems	Microsoft Windows, Mac, NetWare, Unix and Linux
Acoustics	Printing: 56 dBA; Copying: 57 dBA; Scanning: 52 dBA; Idle: 30 dBA
Size (WxDxH)	22 in. x 26 in. x 33 in. (560 mm x 660 mm x 850 mm)
Weight	103 lb. (47 kg)

Media Specifications		Shipping Dimensions
Paper Capacity (sheets) Standard Maximum	Input: 1,100 (500 + 500 + 100 MPF); Output: 500 Input: 3,100 (500 + 500 + 2000 + 100 MPF); Output: 500	Lexmark Clinical Assistant Size: 31.3 x 27.7 x 62.8 Weight: 190 lb.
Paper Sources Standard Maximum	Input: 3; Output: 1 Input: 4; Output: 1	
Media Information Types	Plain paper, paper labels, card stock, transparencies, envelopes, vinyl labels, polyester labels, dual web and integrated labels	
Size	Letter, Legal, A4, A5, JIS B5, Executive, Folio, Statement, Universal (2.75 in. x 5 in. to 8.5 in. x 14 in), envelopes (7 3/4, 9, 10, DL, C5, B5)	
Weight	Plain paper: 16 to 47 lb. (60 to 176 g/m ²); Card stock: up to 110 lb. (199 g/m ²)	


Part Numbers		
Supplies	32,000-page Extra High Yield Return Program Print Cartridge ¹ 32,000-page Extra High Yield Return Program Print Cartridge for Label Applications ¹ 21,000-page High Yield Return Program Print Cartridge ¹ 21,000-page High Yield Return Program Print Cartridge for Label Applications ¹ 10,000-page Return Program Print Cartridge ¹ 32,000-page Extra High Yield Print Cartridge ¹ 21,000-page High Yield Print Cartridge ¹ 10,000-page Print Cartridge ¹ Routine Maintenance Items: Separator Roll Kit Pick Up Assembly Pressure Pad Cushion Charge Roll Kit Transfer Roll Kit Label Fuser Wiper Pick Tires Fuser Maintenance Kit	X644X11A X644X01A X644H11A X644H01A X644A11A X644X21A X644H21A X644A21A 40X0454 40X0453 40X0466 40X0127 40X0130 40X2665 40X0070 40X0100
Memory Options	128MB SDRAM 256MB SDRAM 512MB SDRAM 32MB Flash Card 64MB Flash Card	13N1523 13N1524 13N1526 1021208 1021209
Furniture	Low Profile MFP Stand MFP Stand with Cabinet MFP Stand	16C0379 16C0369 16C0389
Warranty	1-year, next business day Onsite Repair 1-year Onsite Repair 2-year Onsite Repair 3-year Onsite Repair	Base 2348322 2348323 2348324

Additional Part Numbers

Solutions	Traditional Chinese Font Card	1021242
	Japanese Font Card	1021243
	Korean Font Card	1021240
	Simplified Chinese Font Card	1021241
Connectivity	External Print Servers N4050e Wireless 802.11g Print Server ¹	14T0145
	Internal Print Servers ² MarkNet™ N8020 Gigabit Ethernet	14S0200
	MarkNet N8030 Fiber Ethernet	14S0220
	MarkNet N8050 802.11g Wireless	14S0165
Cables	10-foot Parallel Cable	1021231
	6-foot USB Cable	1021294
Adapters	Parallel 1284-B Interface Card	1021091
	RS-232C Serial Interface Card	1021092
Media	Transparencies (letter)	70X7240

¹ Requires USB connection

² Use of an Internal Print Server disables the Ethernet card resident in the printer

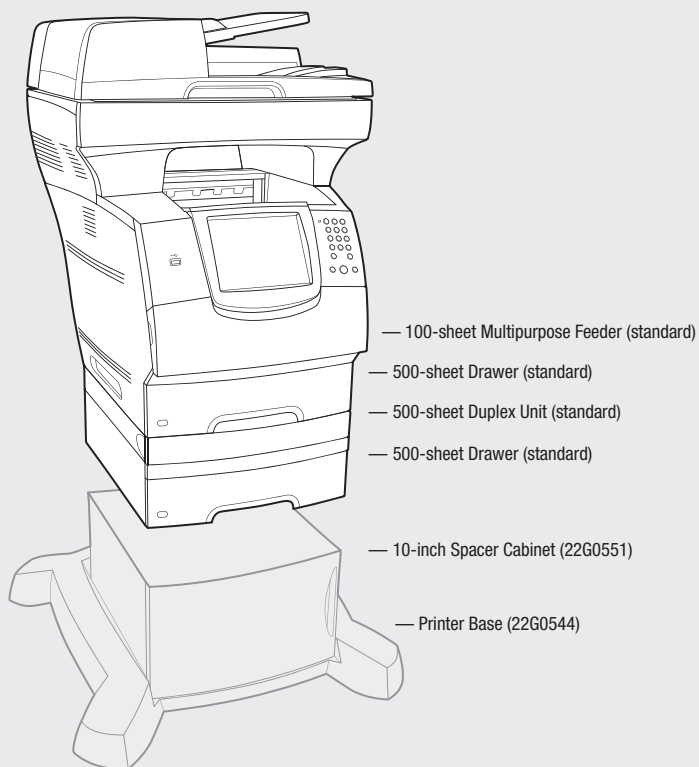

Options Not Pictured

250-sheet Drawer	20G0889
250-sheet Tray	20G0879
500-sheet Tray	20G0884
250-sheet Universally Adjustable Drawer	20G1223
400-sheet Universally Adjustable Drawer	20G1218
250-sheet Universally Adjustable Tray	20G1224
400-sheet Universally Adjustable Tray	20G1217
2000-sheet Drawer (letter only)	20G0892
85-sheet Envelope Feeder	20G0891

Terms & Conditions

Lexmark, Marknet and Lexmark with diamond design are trademarks of Lexmark International, Inc., registered in the United States and/or other countries. PCL is a registered trademark of Hewlett Packard Company. All other trademarks are the property of their respective owners. All content within is subject to change. © 2007 Lexmark International, Inc. All rights reserved.

71K1219